


|                     |                     |
|---------------------|---------------------|
| Watts               | 15W/ 25W            |
| Luminous Efficacy   | 100lm/W             |
| Light Source        | COB                 |
| CRI                 | 90+                 |
| Power Factor        | >0.9                |
| Ambient Temperature | ±55                 |
| Material            | Die-Cast Aluminium  |
| Life Span           | 50000 Hrs           |
| Mounting Type       | Recessed-Adjustable |
| Voltage & Frequency | 100-240V & 50-60Hz  |



Note: Argia products come equipped with standard drivers by default;however, alternative driver options can be provided upon request.

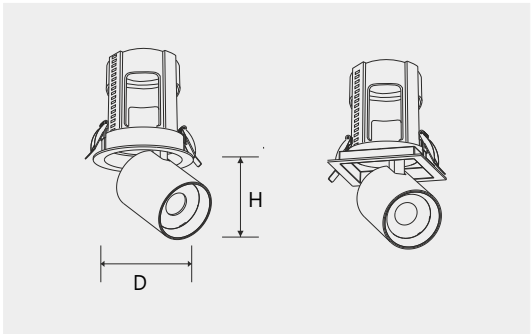

Example code: ARGIA-STRUMIL-RB-15W-30-00-N-BK

| Model                      | W   | Lumens | Dimension          | Cutout    | CCT     | Source     | Beam Angle | Finishes |
|----------------------------|-----|--------|--------------------|-----------|---------|------------|------------|----------|
| STRUMIL-RB<br>ROUND BEZEL  | 15W | 1500   | Ø110×H120          | Ø95       | 27 2700 | 00-NON-DIM | N-NARROW   | ● BK     |
|                            | 25W | 2500   | Ø130×H140          | Ø115      | 30 3000 | 01-DIM     | M-MEDIUM   | ○ WH     |
|                            |     |        | Ø130×H140          | Ø115      | 40 4000 | 02-DALI    | W-WIDE     |          |
| STRUMIL-SB<br>SQUARE BEZEL |     |        | L110×W110<br>×H120 | L95×W95   | 50 5000 |            |            |          |
|                            |     |        | L130×W130<br>×H140 | L115×W115 |         |            |            |          |

INDOOR | DOWNLIGHTS